



# minicam

## PROTEUS

The LAT150 is a mainline to lateral inspection crawler designed to offer range, reliability and functionality. Whether you're offering pre-acceptance inspection, searching for cross bores or inflows or conducting a structural survey, Minicam's self-propelled LAT150 has you covered.



**Crawl 1150ft**

**Launch 150ft**

**8 x 8 Steerable**

# Innovative. Robust. Reliable.

## Pan-Tilt Laser Camera

Expertly engineered in stainless steel and aluminium, this robust camera offers maximum pan and rotate flexibility for use in small diameter pipe applications, from 2.36" up. The camera features an integral distance sensor and dual aligned visible lasers, to enable accurate pipe diameter, defect, and object measurement, directly from the control unit. The precision camera lens and four ultra-bright LED's guarantee clear, defined, quality inspection images.



## Flexible Pivot

Horizontal pan and vertical tilt positioning of the deployment arm provides the operator with optimum flexibility.



## Hinged Mid-section


The hinged mid-section allows for flexible mainline entry for access sizes as small as 12.5". No hinge locking required due to constant wheel support.

## Rod Rollers

Assists smooth friction-free guiding of the push rod.

## Observation Camera and LED Auxiliary Light

Forward facing precision camera capable of 740TVL resolutions with powerful ultra-bright LEDs provides a bright, clear picture to assist launching into the unknown with confidence.

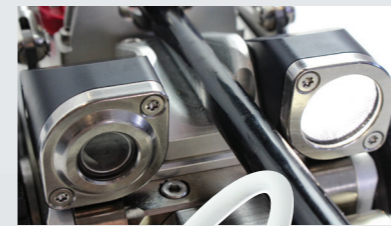


## Meterage Counter

Close to deployment for an accurate lateral distance measurement.



## Back-eye Camera and LED Auxiliary Light

Taken from our tried and tested Proteus Back-eye camera and positioned above flow, this colour camera and LED light enables confident cable management during reverse travel.

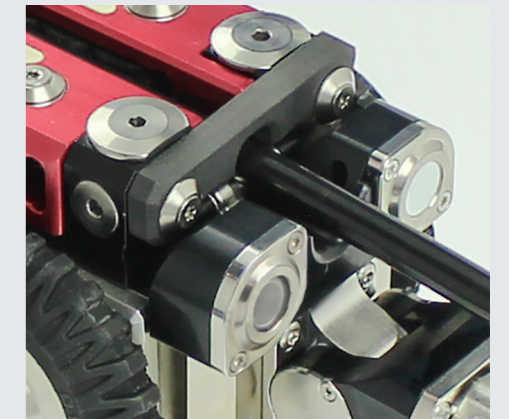

## Lateral Pin

The optional pin adjusts the direction and guides the camera smoothly along the pipe.

## Pan-tilt Deployment Arm

The standard deployment arm provides horizontal pan and vertical tilt via the flexible front pivot, which enables accurate positioning of the camera/push rod prior to launch. For larger mainlines, the unique design of the pivot provides quick and easy attachment of deployment tubes in varying sizes.



## Quick Change Wheel Lock

Easy single tool wheel lock enables you to use a variety of wheel sizes and type to offer significant performance benefits in various pipe diameters and for specific operating conditions.



## Lateral Drive Belt

The drive mechanism maximizes your productivity by powerfully feeding the push rod up to 150 feet. The drive belt is designed to repel debris whilst in operation, using a flexible, the tread is designed to remove dirt and prevents belt clogging, meaning long service intervals. The drive belt housing is user-serviceable enabling a quick single tool cartridge change while on-site.



## Articulated 'Knuckle' Connector

Enables easy deployment of the crawler and prevents water ingress to the connections.

## Crawler Nudge Mode

Use the orange coloured arrows on the keyboard to nudge incremental distance for truly accurate positioning of the crawler.




## Single Click Mode Change

Changing control mode between mainline and lateral is made easy by a single click of the joystick top button.



## Wheel Configurations

Minicam's patented quick release wheel lock enables the user to quickly change wheel configurations of the LAT150 to launch in main lines from 6" to 80" diameter. Wheel sizes compatible with LAT150 are 3.5", 4.5" and 5.5".

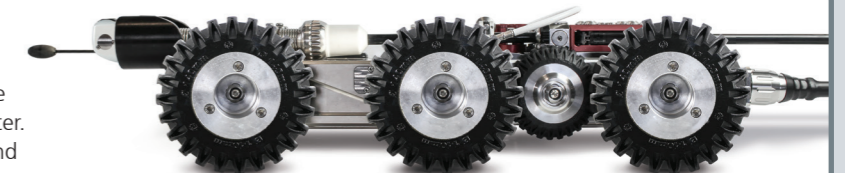

LAT150 with 140mm Soft Rubber Wheels (QRW140SR/150)



Camera / Rod  
Lateral Distance  
150 feet

Crawler  
Distance  
1150 feet

Mainline  
Compatibility




12" → 80"

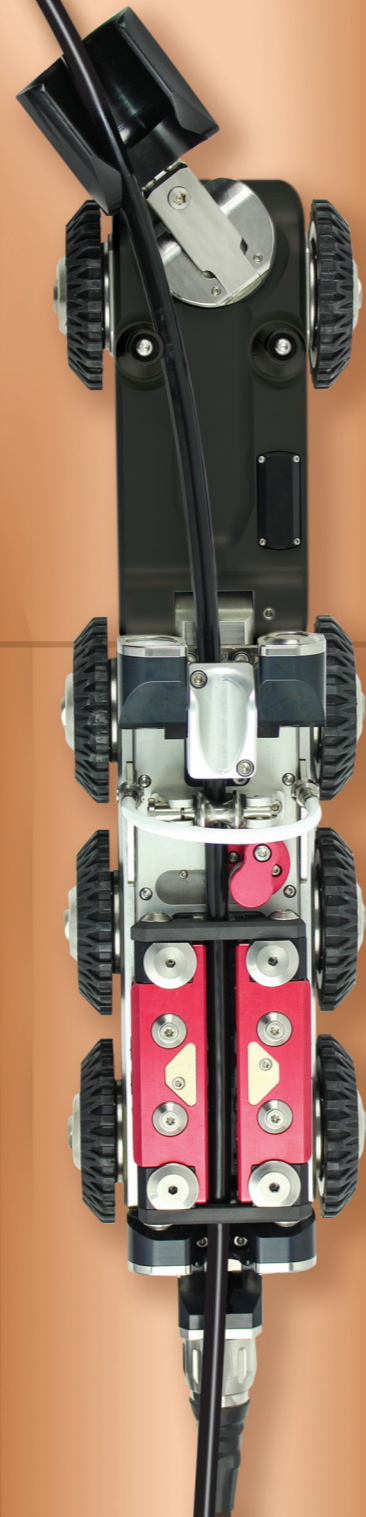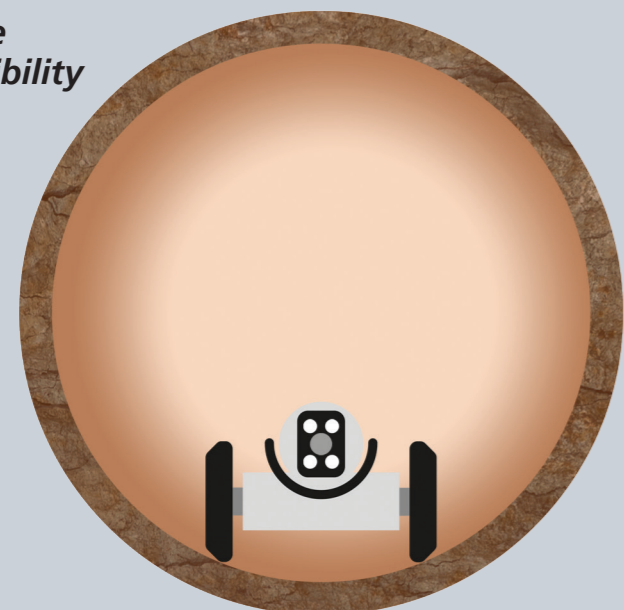

## Reels

Dual reels with installation flexibility in van arrangements (example shown below) are used to drive the LT150 crawler. The Lateral Reel gives you 1150 feet of mainline capability to then extend the main camera up to 150 feet into a lateral pipe, while the mainline reel provides cable to the crawler for runs of up to 1150 feet within the mainline pipe. Ultra-smooth operation is provided by a powerful motor and cable layering mechanism, specially designed for uninterrupted, tangle free pay-out and re-winding. Clear safety screens prevent contact with the cable whilst coiling, and for additional safety there is a rigid lid and an e-stop button.


Lateral Reel  
Mainline Reel  
Lateral Launch

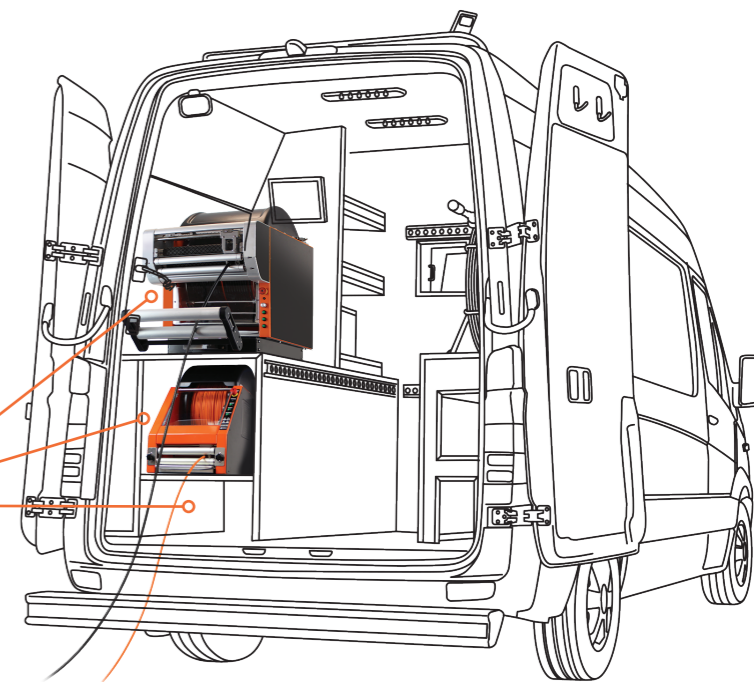

Right: Typical Lateral Launch system layout for the CCTV vehicle inspection vehicle

### Lateral Reel - LCR350

Fitted with 1150 feet of high strength, Kevlar reinforced inspection cable and 150 feet of flexible 1/2" diameter push rod. The extendable arm of the guide roller has 4 distance locks enabling the cable/rod to be deployed from the optimum position.

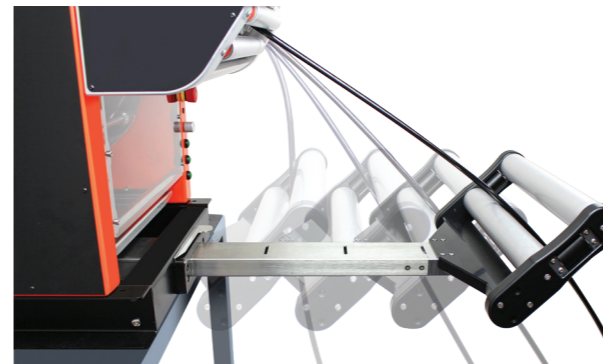

LCR350

### Mainline Reel - ACR350

Used in conjunction with the lateral reel this fully automatic reel provides a distance capability of 1150 feet to power the crawler along the pipeline. It uses our tried and tested Kevlar reinforced inspection cable, and has all the functionality and safety features of the lateral reel. For additional smooth friction-free guiding, an optional van guide pulley is available.



VGP350

Optional Van Guide Pulley for the ACR350



ACR350

# Manageable Manoeuvrability

The LAT150 offers a multitude of options to help overcome challenging situations and give complete control of each launch. The system has flexible but easy to use options available such as, various configurations and sizes of wheels, deployment tubes and the lateral pin.

## Deployment Tubes

For larger mainlines, to enable accurate positioning of the camera prior to launch, the LAT150 can be fitted with various sized deployed tubes. The unique design of the pivot provides quick, easy and tool-less attachment of deployment tubes in any size.




LAT150 with 5.5" Soft Rubber Wheels (QRW140SR150)

## Wheel Configurations


Minicam's patented quick release wheel lock enables the user to quickly change wheel configurations of the LAT150 to launch in main lines from 12" to 80" diameter. Wheel sizes compatible with LAT150 are 3.5", 4.5" and 5.5".

Optional performance wheels are available in high grip and carbide which offer significant performance benefits in various for specific operating conditions, such as greasy and/or plastic pipes.

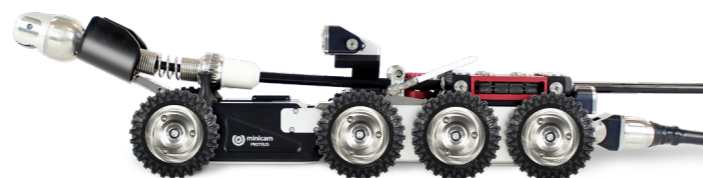

## Lateral Pin

A useful addition to the Pan-tilt and Laser Camera CAM050. simply attach the pin to assist in directional guidance within a lateral pipe. The pin helps to overcome entry to bends & junctions and guides the camera smoothly along the pipe.

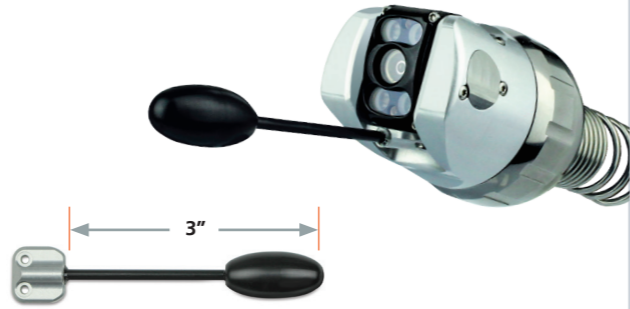

Lateral Pin  
Product Code: ASS-006-322

## Observation Camera Extension Support

Raises the camera for a better view in pipes 8" and above.



The LAT150 comes with 8x wheel drive and observation and reversing camera's included as standard, making traversing awkward in-pipe obstacles an easy task in pipes as small as 12".

The self-propelled lateral camera unit allows you to inspected lateral pipes as small as 2 1/2" with over 150 feet of deployment range, all while offering Pan and Tilt camera functionality with laser measurement.

With diverse functionality and range and Mini-Cam's industry renowned reliability the LAT150 is the go to product for any mainline to lateral survey requirement.

## SPECIFICATIONS

Crawler - LAT150	
Crawl distance	1150ft
Launch distance	150ft
Observation Camera Lens	740TVL
Drive train	8 x 8 steerable high torque all-wheel drive
Wheel Compatability	3.5, 4.5, 5.5 inch
Pipe diameter capabilities	Min 6inch - Max 80inch
Minimum Access Size	12inch
Rating	IP68 Pressurised
Maximum Water Depth	33ft
Internal Pressure	7.2 PSI
Construction	Aluminum / Brass
Material (rear body)	Brass (Zinc Coated)
Material (front body)	Brass (Zinc Coated)
Material (Lateral Drive Module)	Anodised Aluminum
Multi-frequency Sonde	33k 521
Size (L x W x H)	24 x 5.5 x 5.1 inch
Height with Observation Camera	6.3 inch
Weight	36.5 lb
Continuous monitoring of speed, internal pressure inclination and temperature	
Dual axis inclination sensor	
Rear articulated 'knuckle' connector	
Quick change wheel lock	

REELS	Lateral Reel - LCR350	Mainline Reel -ACR350
Operation	3 Phase motor	
Payout / Rewind	Cable layering mechanism	Cable layering mechanism
Emergency stop button	In-built	In-built
Push rod length	150ft	-
Cable length	1150ft	1150ft
Cable type	Kevlar reinforced	Kevlar reinforced
Power Supply	100-240 VAC	100-240 VAC
Power Consumption	600W	600W
Dimensions L x W x H	35 x 19 x 28 inch	26 x 17 x 25 inch
Weight	264.5lbs	92.5lbs
Van Guide Pulley	Integral	VGP350 (Optional)

Pan-Rotate Laser Camera - CAM050	
Imager	CMOS Colour Camera
Effective pixels	976 x 496
Resolution	740 TVL
Lasers	Dual aligned front facing / single side
Sensitivity	< 1.0 Lux
Aperture / Field of view	F2.5 / 75°
Image orientation	Auto- levelling
Lighting capabilities	4 x high powered LEDs
Illumination intensity	Adjustable to 12.5k Lux at 6 inch
Pan-tilt	Continuous 360° rotation and +/-135° pan
Construction	Stainless Steel / Aluminum
Pipe compatibility	Greater than 2.36 inch
Dimensions	1.93 inch
Weight	1.25 lbs



[www.minicamgroup.com](http://www.minicamgroup.com)

Minicam Ltd, Unit 33, Ravenscraig Road, Little Hulton,  
Salford, M38 9PU  
Tel: +44 (0) 1942 270524 • Email: [info@minicamgroup.com](mailto:info@minicamgroup.com)

  
A Halma company



©2021 Minicam Ltd. All rights reserved. Proteus, ProPIPE+ and Minicam names and logos are trademarks of Minicam. Specifications subject to change without notice. Images for illustration purpose only.

DESIGN 240122