

Proteus Control Unit

- 12" Sunlight Viewable Touchscreen Display
- New and Improved User Interface
- Designed to meet IP65 ingress protection standards
- 8 Dedicated Hot-Keys
- Dedicated Crawler and Camera Control Pods
- Ergonomic, Soft-Touch, Waterproof, Anti-Microbial Keyboard
- Embedded Reporting Software with all major reporting standards
- Weatherproof, Industrial Case



Compatibility






With our Next-generation Minicam Control Unit you can view, record, and annotate inspection footage with ease. Designed with the operator in mind, our ergonomic control system helps you to speed up inspections in the field. Our new control system is even simpler to use and more powerful than ever, with a range of new features and functions. Sleek and modern, the unit is built to last and stand against the environmental challenges faced during in-the-field surveys.


Technical Data


Controls	Dedicated camera and dedicated crawler control pods
Battery	Lithium Ion + up to 7.5 hours on screen time
Charging	Powered from Proteus interface or USB-C (20 VDC) adaptor
Screen	12" sunlight viewable touchscreen (1000 nits)
Keyboard	Full size QWERTY IP68 backlit silicone keyboard, international versions also available.
Video Recording	MPEG4 (WinCan compatiable)
Image Capture	JPEG (Live or from recorded video)
Internal Storage	256GB (Expandable to 2TB Total)
External Media	Supports external storage via USB
Language Support	Multi language support
Connections	1x Minicam Control Interface (rear), 2x USB-C (side)
Environmental Rating	IP65
Weight	7 kg / 15.5 lbs
Dimensions	501 x 173 x 395 mm / 19.5 x 7 x 15.5 inch
Processor	INTEL® Quad Core 1.5 GHz Processor
RAM	4 GB
Reporting Software	Embedded Minicam Reporting Software powered by WinCan ProTouch
Video Output	HDMI via USB-C
	<u> </u>

Proteus Control Unit

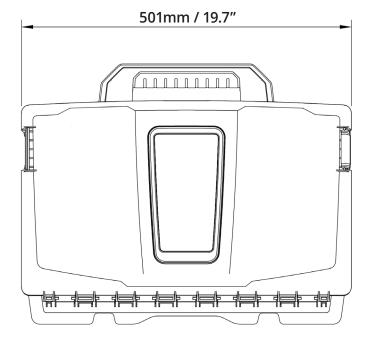



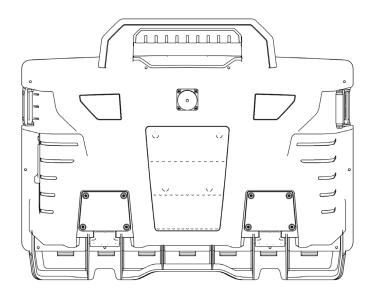



180923 © 2023 Minicam







